

(19)



(11)

EP 1 171 065 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
14.03.2007 Bulletin 2007/11

(51) Int Cl.:
A61F 13/00 ^(2006.01) **A61F 13/10** ^(2006.01)

(21) Application number: **00920925.5**

(86) International application number:
PCT/GB2000/001566

(22) Date of filing: **20.04.2000**

(87) International publication number:
WO 2000/064394 (02.11.2000 Gazette 2000/44)

(54) **WOUND TREATMENT APPARATUS EMPLOYING REDUCED PRESSURE**

VORRICHTUNG ZUR WUNDBEHANDLUNG MIT REDUZIERTEM DRUCK

APPAREIL PERMETTANT DE TRAITER DES BLESSURES SOUS PRESSION REDUITE

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**

(30) Priority: **22.04.1999 GB 9909301**

(43) Date of publication of application:
16.01.2002 Bulletin 2002/03

(60) Divisional application:
06027012.1

(73) Proprietor: **KCI Licensing, Inc.**
San Antonio, TX 78265-9508 (US)

(72) Inventors:
• **HEATON, Keith Patrick
Poole,
Dorset BH13 0QG (GB)**
• **HUNT, Kenneth William
Wimborne,
Dorset BH21 1TY (GB)**

(74) Representative: **Lockey, Robert Alexander
Forrester & Boehmert
Pettenkoferstrasse 20-22
80336 München (DE)**

(56) References cited:
DE-B- 1 093 949 **US-A- 4 969 880**
US-A- 5 527 293

EP 1 171 065 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to an apparatus for the healing of wounds and more particularly to preventing progression of partial-thickness burns, known, for instance, from US-A-4 969 880.

[0002] Where a person suffers a burn, the dermal and epidermal layers in the region of the wound are damaged. Closure of the resulting wound is important to prevent loss of body fluids and invasion by micro-organisms. In the case of a partial-thickness burn, epithelial and subcutaneous tissue adjacent to the wound will migrate outwards and eventually grow new tissue over the wound. A wide array of wound coverings have been developed to expedite wound closure and allow the natural processes of repairing the damaged tissue to proceed.

[0003] The prognosis of a wound caused by a burn depends on the severity of the injury and particularly the depth of the burn. In general, a partial-thickness burn will heal more quickly and with less complications than a deeply penetrating burn. It has been observed that partial-thickness burns often deteriorate and become more serious, deeper burns, if not treated promptly after incurring the burn injury.

[0004] The hands more often suffer burn injuries than other parts of the body. Probably, this is due to the natural reaction of attempting to protect the face with the hands and, in many cases, the burn injury is to the backs of the hands. Other parts of the body which more frequently suffer burns may be the arms, feet and legs.

[0005] The present invention seeks to provide apparatus for treating injuries to a part of the body, especially injuries caused by burns.

[0006] According to one aspect of the present invention there is provided an apparatus for stimulating healing of wounds which comprises an envelope for receiving an affected part of the body, said envelope including a substantially air-tight cover and a porous pad within the cover, said pad being adapted to contact the wound surface, and connection means for connecting the interior of the envelope to a source of negative pressure, the cover having a re-sealable opening which permits the wound to be inspected at intervals.

[0007] By substantially "air-tight" cover is meant one which is sufficiently air-tight that by applying suction to the porous pad, a pressure below ambient can be maintained within the envelope. It is not, however, necessary for the material of the envelope to be totally air occlusive.

[0008] It has been found that when negative pressure therapy using the apparatus of the invention is applied to a burn within relatively short time of incurring the injury (e.g. within about 12 hours), not only is the rate of healing improved but progression of a partial-thickness burn to a deeper injury is arrested.

[0009] In one embodiment, the apparatus of the invention the envelope comprises a glove, sleeve or sock. For example, the apparatus may include a glove formed from a flexible plastics or rubber foam which is contained within

a cover of low air-porosity. Typically, the flexible plastics foam is polyurethane or polyvinyl alcohol (pva) foam having intercommunicating cells or a combination of such foams, e.g. as a laminate. In such a laminate, the pva layer may be adjacent the wound.

[0010] Additional features of the present application will be come apparent from the following description and accompanying drawings, in which:-

Figure 1 is an exploded perspective view of the porous pad;

Figure 2 is a perspective view when the porous pad is assembled together;

Figure 3 is a perspective view of the porous pad within its cover;

Figures 4a to 4d show various views of a connector for pneumatically connecting the porous pad to a source of negative pressure; and

Figure 5 is a plan view of a modified cover.

[0011] The embodiment shown in the accompanying drawings is designed for use in treating burns to the hand.

[0012] It will be appreciated that various appropriate modifications are possible for treating burns to other parts of the body, such as feet within the scope of the invention.

[0013] Figures 1, 2 and 3 show apparatus (10) for treating wounds to the hands comprising a porous pad having a lower base (22), a middle section (24) and an upper section (26) incorporated within a cover (12) of low air porosity. The porous pad is in the form of a glove or mitten and may be constructed by fixing the upper section (26) to the base (22) while retaining the middle section (24) within the cavity so formed. Typically, the porous pad is a reticulated plastics foam, and may be formed by gluing or welding the separate sections together. When placed inside the pad, the hand is held in place with fingers spread by finger-separators (25) and V-cut type grooves (14). As shown in Figures 2 and 3, the foam may be shaped to provide for a separate supporting compartment (27) for the thumb to aid the attainment of the optimum positions of the fingers and thumb for healing. However, this is not essential. The pad is preferably made from a reticulated foam such as polyurethane as described in PCT application WO 96/05873, polyvinylalcohol foam or a combination thereof.

[0014] Figure 3 shows the assembled pad after insertion into a cover (12). Cover (12) is an envelope formed from air-impermeable sheet material, e.g. polyurethane or polyolefin film, and is sized to encompass the glove-shaped porous pad. One end of the cover (12) has a large opening which is closable by an easily re-sealable means (4) such as a zip-type seal used on food bags. The other end (8) includes a substantially impermeable pressure-sensitive acrylic resin adhesive (9), the underside of which is secured as a tight seal to the patient's skin. The open end (8) may be coated on its inner surface with a pressure-sensitive acrylic resin adhesive (9) in order to seal the cover to the patient's skin, e.g. at the wrist

or lower arm. Alternatively, the end (8) may be sealed to the patient's wrist with a separate piece of adhesive tape, such as a polyurethane film coated with a pressure-sensitive adhesive. The open end (8) is open and is tapered as shown. By providing a taper, the open end can be cut to a size such that the opening will fit snugly around the patient's wrist. Attached to the cover (12) in the region of a central part of the porous pad is a connector (100). Connector (100) may be attached to the cover by adhesive.

[0015] Figure 5 is a plan view of a cover similar to cover (12) shown in Figure 3. The same reference numerals are used to indicate corresponding parts. The cover shown in Figure 5 differs from that shown in Figure 3 in that the end (8) for attachment at the patient's wrist has a somewhat larger taper and is designed so that the end can be trimmed to suit the patient. The connector (100) has a generally circular flange (101) whose underside face (i.e. the face which in use contacts the foam page 20) is formed with small projecting buttons. The construction of this aspect of the connector is as described in GB Patent Application No. 2,333,965. Instead of using a zip lock seal, a seal of the "Velcro" type can be used. In this embodiment, a zip lock seal (4) is formed from polyethylene and this is joined to the rest of the cover, which is formed from polyurethane, by adhesive tape.

[0016] Figures 4a to 4d show various views of the connector (100) and it will be seen that it comprises a moulded plastics flange portion (101) and suction port having a centrally positioned spout (102) and aperture (106). The connector (100) is firmly attached to the cover by an adhesive. The spout extends through a hole cut in the cover and the upper surface of the flange 101 is bonded with adhesive to the cover (12). The spout (102) is sized to accept as a closely sliding fit, the end of a single or multi-lumen tube (30) which emerges from beneath the wound cover (12). Tube (30) may be constructed as described in co-pending patent application WO 97/18007. Where a multi-lumen tube is used, one lumen can be used for measuring the pressure at the burn site. It is also within the scope of this invention to irrigate the burn or other wound through one of the lumens or via a separate connector to the foam pad. The connector or connectors can be used to introduce drugs, e.g. antibiotics, to the wound site. The cover drape (12) is preferably made from a flexible film of low air permeability such as polyurethane and may include a protective layer of polyethylene. Suitable materials are described in GB patent application No. 2,333,965.

[0017] In use, the hand of a patient having a burn injury is introduced into the outer cover (12) via the open end (8). Re-sealable opening (4) may then be opened and folded back to expose the injured hand. The hand is then introduced into the porous pad which may be pre-assembled or assembled in situ around the injured hand. In the latter case, it may be convenient to fix the upper section (26) to the lower section (24) by suturing or stapling, rather than gluing or welding the foam. With the foam pad in

place encompassing the injured hand, the cover (12) is drawn back over the porous pad and the opening (4) re-sealed. Spout (102) is then connected by a tube to a suction pump, e.g. using the technique described in WO 97/18007. Pulsed, intermittent or continuous negative pressure may be applied to the patient's hand in accordance with a programme which may be controlled automatically by a control device associated with the pump as described in our above patent application. Negative pressure therapy using the apparatus of the invention has been found to stimulate healing of burns and to reduce the progression of cell death beneath a burn injury. Also, by improving blood flow to the wound area, infection is controlled and granulation of the wound is stimulated.

[0018] One additional beneficial effect of therapy using the apparatus of this invention is that during therapy, the hand is held firmly in a half closed position, which is the optimum position for promotion of healing. This can be further encouraged by the introduction of a rigid or semi-rigid splint, e.g. of plastics, which is formed or moulded into the desired shape, the collapsed dressing being strapped to the splint during or after application of the suction, so that the desired healing position can be maintained after release of the suction.

[0019] The suction pump is preferably controlled by control means including a pressure transducer for monitoring pressure at the wound site as described in our above PCT application. A timer device may also be associated with the pump to provide on/off operation if necessary at selected intervals. The apparatus may also include a canister located between the porous pad and the pump to collect wound exudate. Typically, the pump is a diaphragm pump but other types of pumps and equivalent components, such vacuum bottles, may be substituted. The apparatus may also be used with a wall suction source as described in GB patent application No. 2,342,584.

[0020] The terms and expressions which have been employed are used as terms of description and not of limitation. Although the present invention relates mainly to partial-thickness burns, it is understood that the present invention may be used with open wounds as well as a possible treatment of pressure sores.

Claims

1. Apparatus for stimulating healing of wounds which comprises an envelope for receiving an affected part of the body, said envelope including a substantially air-tight cover (12) and a porous pad (22, 24, 26) within the cover, said pad being adapted to contact the wound surface, and connection means (100) for connecting the interior of the envelope to a source of negative pressure, the cover having a re-sealable opening (4) which permits the wound to be inspected at intervals.

2. Apparatus as claimed in claim 1 wherein the envelope comprises a glove, sock or sleeve (20).
3. Apparatus as claimed in claim 2 which is intended for treating wounds to the hand and comprises a glove (22, 24, 26) formed from a flexible plastics or rubber foam and an external cover (12) of air-impermeable sheet material.
4. Apparatus as claimed in any one of claims 1 to 3 wherein the connection means comprises a tube (102) which communicates with the porous pad within the cover.
5. Apparatus as claimed in any one of the preceding claims wherein the source of negative pressure is a suction pump.
6. Apparatus as claimed in any one of the preceding claims which includes a canister for collecting wound exudate.

Patentansprüche

1. Vorrichtung zum Stimulieren der Heilung von Wunden, die eine Umhüllung zur Aufnahme eines betroffenen Teils des Körpers umfaßt, wobei besagte Umhüllung einen im wesentlichen luftdichten Überzug (12) und ein poröses Polster (22, 24, 26) innerhalb des Überzuges, wobei besagtes Polster so angepaßt ist, daß es mit der Wundoberfläche in Kontakt kommt, und Verbindungsmittel (100) zum Verbinden des Inneren der Umhüllung mit einer Unterdruckquelle einschließt, wobei die Umhüllung eine wiederverschließbare Öffnung (4) aufweist, die erlaubt, daß die Wunde in Intervallen untersucht werden kann.
2. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, daß** die Umhüllung einen Handschuh, eine Socke oder einen Ärmel (20) umfaßt.
3. Vorrichtung nach Anspruch 2, die dazu gedacht ist, Wunden an der Hand zu behandeln, und einen Handschuh (22, 24, 26), der aus einem flexiblen Kunststoff- oder Gummischaum hergestellt ist, und einen äußeren Überzug (12) aus luftundurchlässigem Folienmaterial umfaßt.
4. Vorrichtung nach einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, daß** das Verbindungsmittel ein Rohr (102) umfaßt, das mit dem porösen Polster innerhalb des Überzuges kommuniziert.
5. Vorrichtung nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet, daß** die Unterdruckquelle eine Absaugpumpe ist.

6. Vorrichtung nach einem der vorangehenden Ansprüche, die einen Kanister zum Sammeln von Wundexsudat einschließt.

Revendications

1. Appareil pour stimuler la cicatrisation de blessures qui comprend une enveloppe pour recevoir une partie touchée du corps, ladite enveloppe comportant un couvercle (12) sensiblement étanche et un tampon poreux (22,24,26) à l'intérieur du couvercle, ledit tampon étant conçu pour être en contact avec la surface blessée, et des moyens de liaison (100) pour relier l'intérieur de l'enveloppe à une source de dépression, le couvercle ayant une ouverture amovible (4) qui permet l'inspection de la blessure par intervalles.
2. Appareil tel que revendiqué dans la revendication 1, dans lequel l'enveloppe comprend un gant, une chaussette ou une manche (20).
3. Appareil tel que revendiqué dans la revendication 2, qui est destiné à traiter des blessures à la main et comprend un gant (22,24,26) formé à partir d'une matière plastique souple ou mousse de caoutchouc et un couvercle externe (12) en une matière en feuille imperméable à l'air.
4. Appareil tel que revendiqué dans une quelconque des revendications 1 à 3, dans lequel les moyens de liaison comprennent un tube (102) qui communique avec le tampon poreux à l'intérieur du couvercle.
5. Appareil tel que revendiqué dans une quelconque des revendications précédentes, dans lequel la source de dépression est une pompe d'aspiration.
6. Appareil tel que revendiqué dans une quelconque des revendications précédentes, qui comporte une boîte pour recueillir l'exsudat de la blessure.

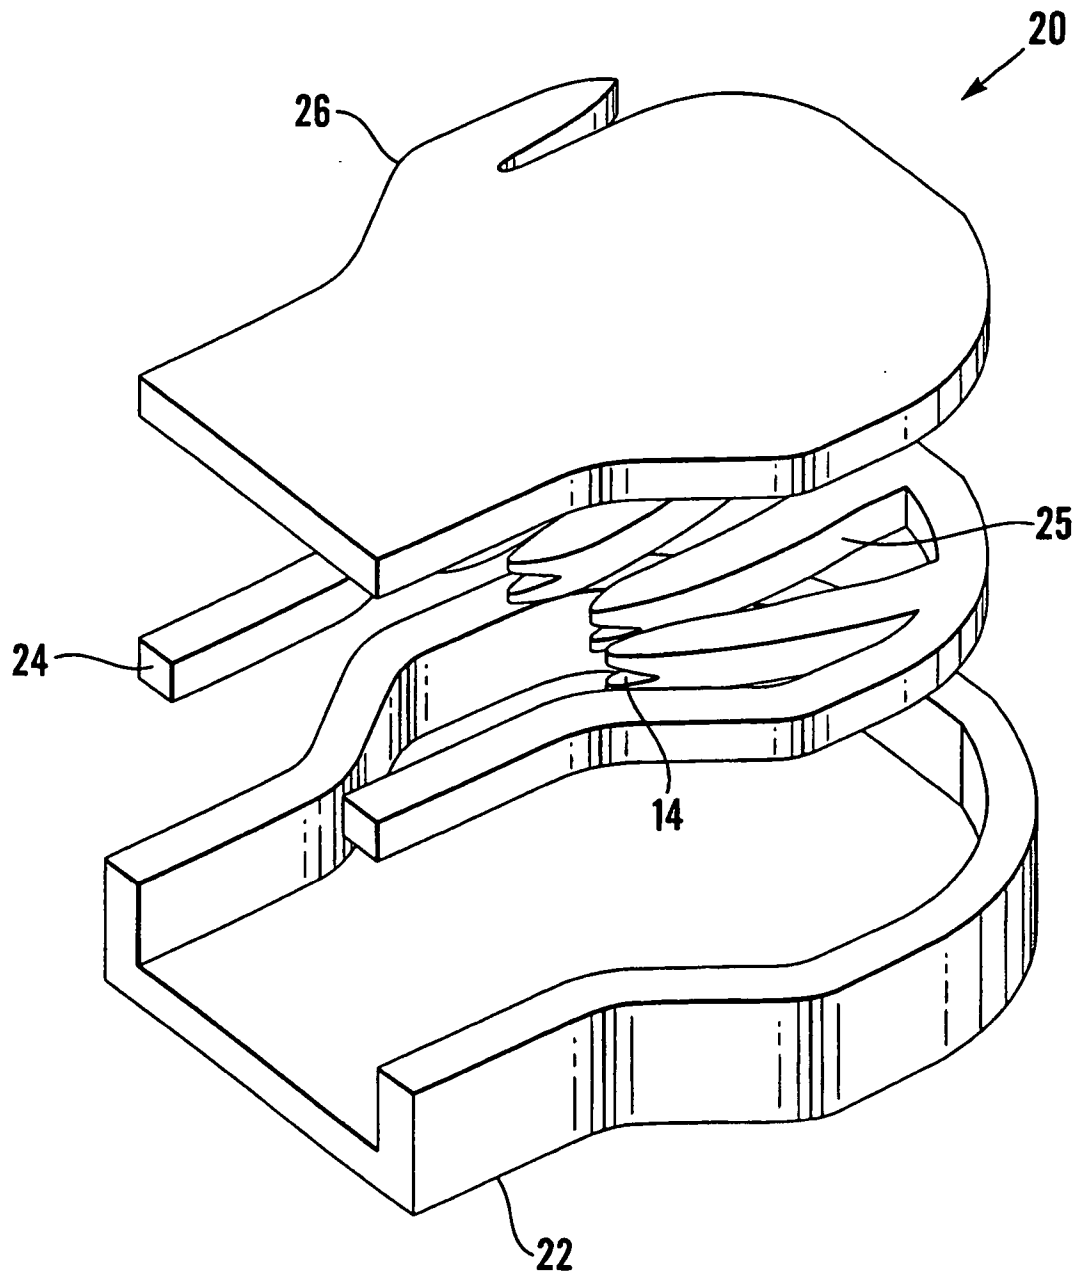


Fig. 1

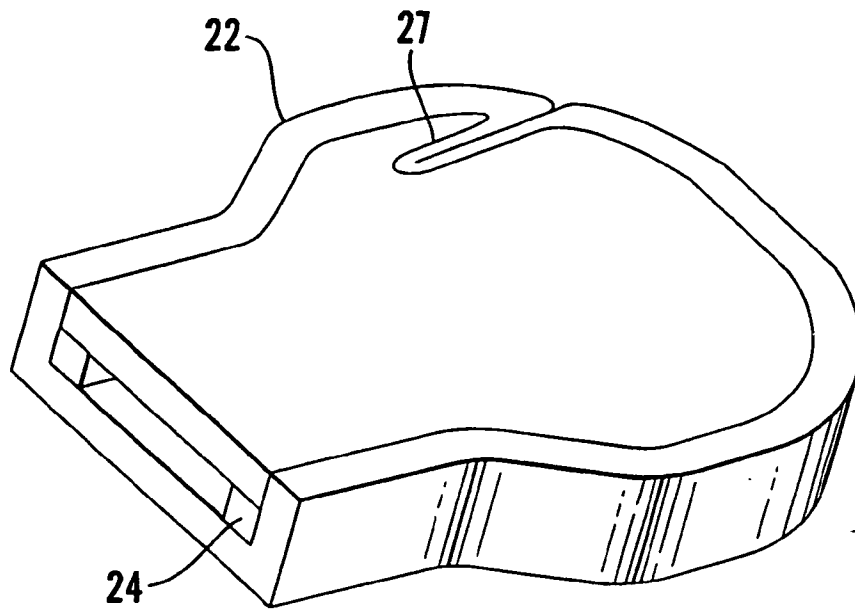


Fig. 2

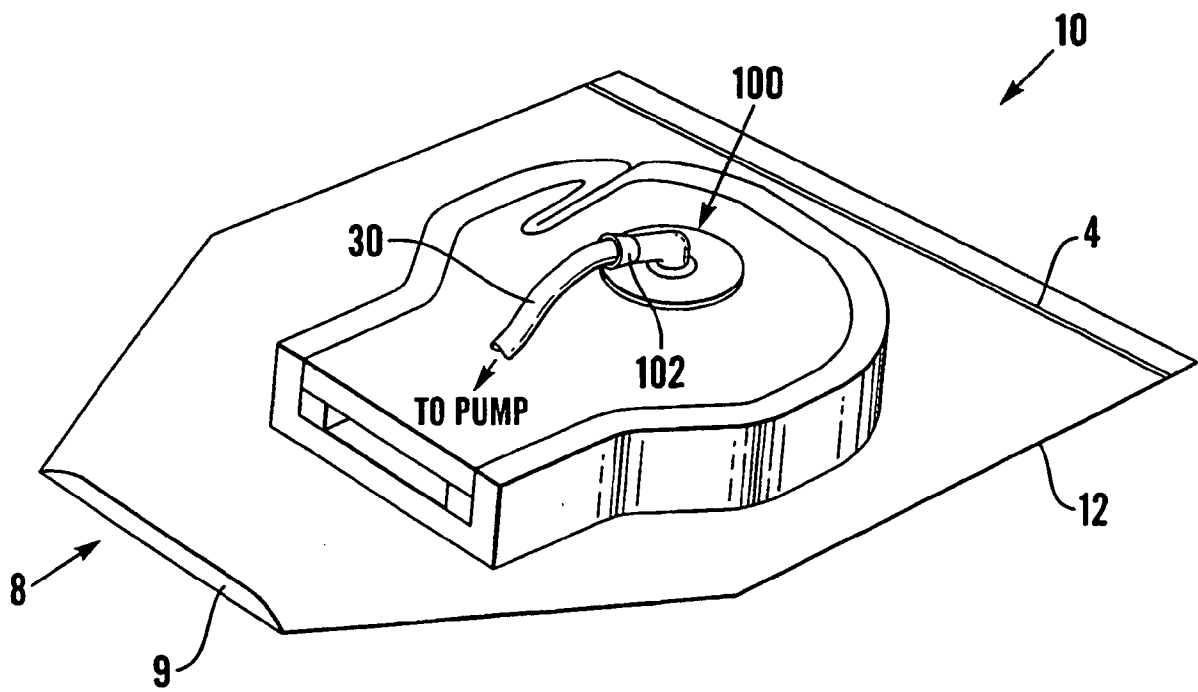


Fig. 3

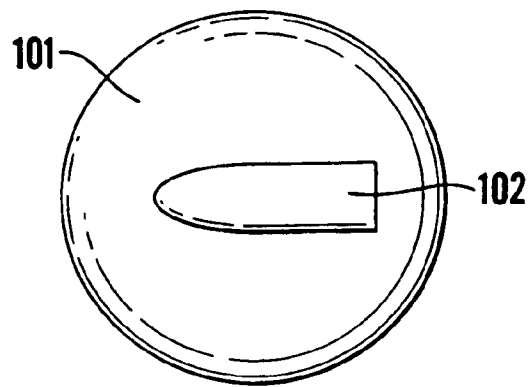


Fig. 4A

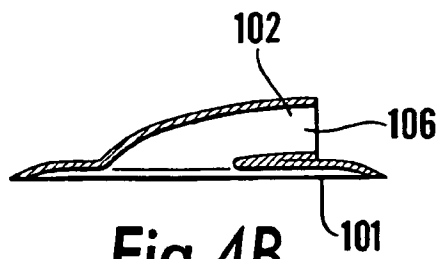


Fig. 4B



Fig. 4C

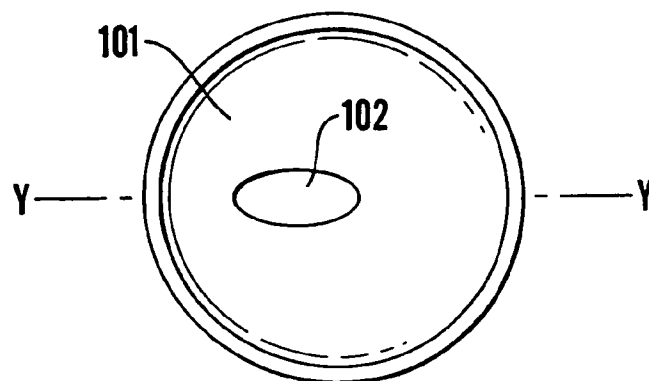


Fig. 4D

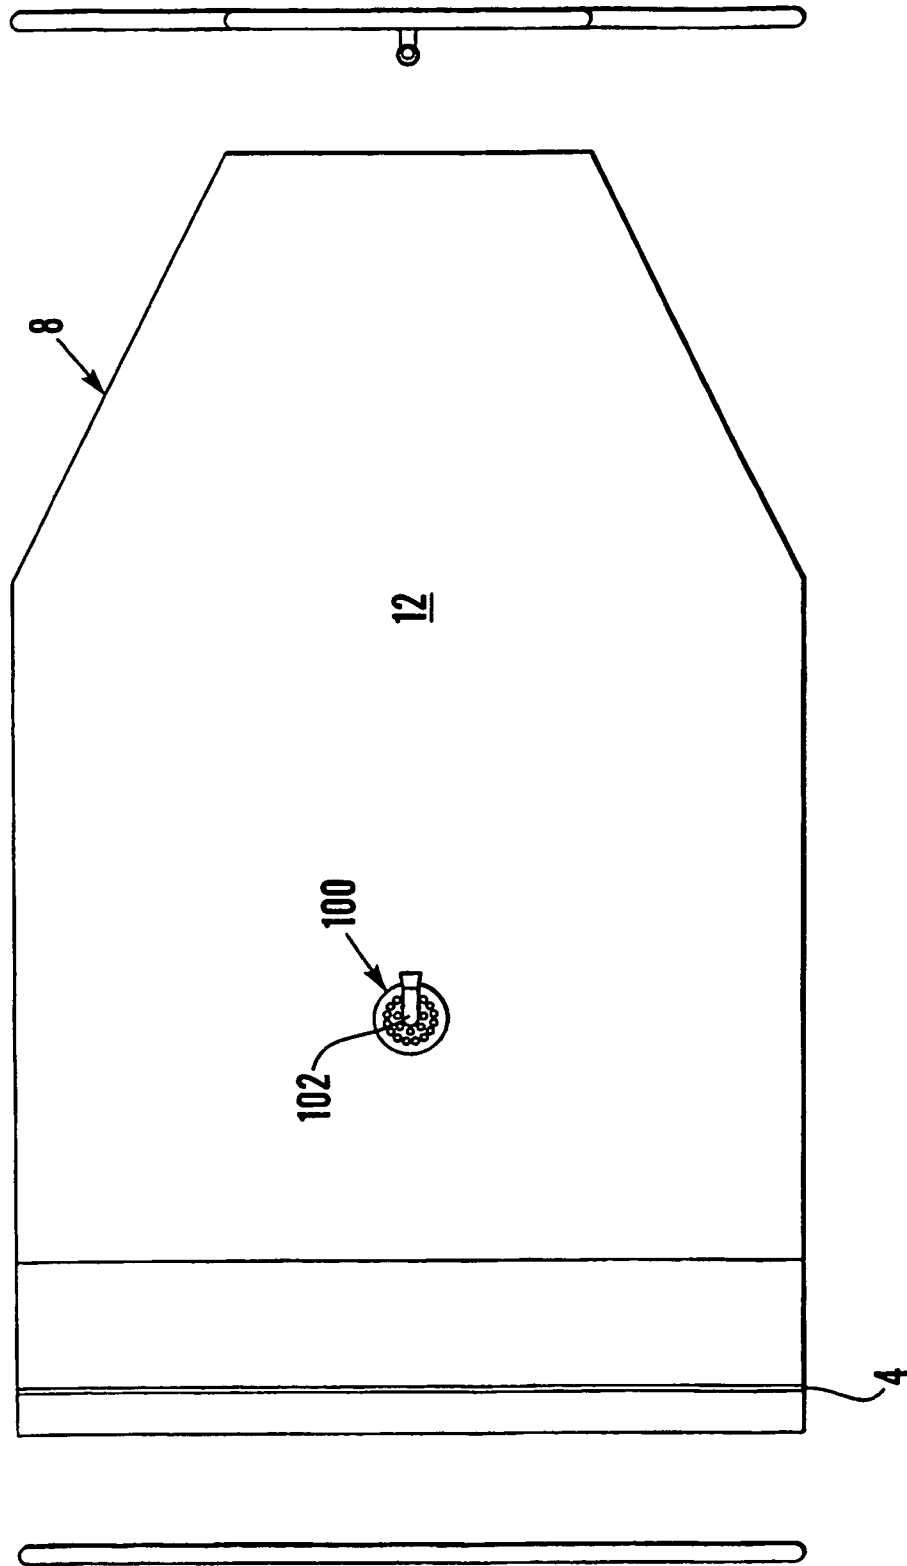


Fig. 5